


Vodootporne fluo svetiljke


VODOOTPORNNA FLUO SVETILJKA TIP: JF8

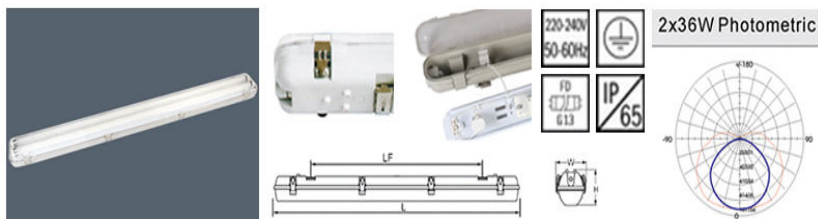

1. Kuciste izradjeno od brizganog UV stabilizovanog sivog polikarbonata
2. Difuzor izradjen od brizganog UV stabilizovanog prozirnog polokarbonata
3. Reflektor: izradjen od celicnog lima prekriven belim polimerom
4. Otporna na vodu, prašinu ili koroziju, može se koristiti u okruženju sa puno vlage i prašine
5. Primenjiva u podrumima, podzemnim parkinzima, tunelima i drugim sličnim mestima...
6. Stepen zaštite IP 65
7. Dodatna oprema: Celicni nosaci za laku montazu

| Model | L | Dimenzije (LxWxH) mm | | | LW | Prigušnice | Fluo cevi | Snaga (W) | Pakovanje (kom/kutija) |
|---------|------|----------------------|----|----|-----|------------|-----------|-----------|------------------------|
| JF8-118 | 670 | 90 | 94 | 94 | 400 | MB/EB | T8 | 1X18w | 6 |
| JF8-136 | 1270 | 90 | 94 | 94 | 900 | MB/EB | T8 | 1x36w | 6 |
| JF8-218 | 670 | 140 | 94 | 94 | 400 | MB/EB | T8 | 2x18w | 6 |
| JF8-236 | 1270 | 140 | 94 | 94 | 900 | MB/EB | T8 | 2x36w | 6 |
| JF8-258 | 1570 | 140 | 94 | 94 | 930 | MB/EB | T8 | 2x58w | 6 |

VODOOTPORNNA FLUO SVETILJKA TIP: YZ-F

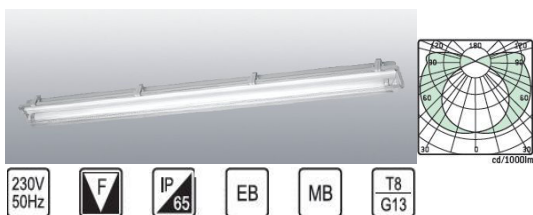

1. Kućište od vrlo jake ABS plastike ili PC
2. Poklopac od PS ili PC
3. Otporna na vodu, prašinu ili koroziju, može se koristiti u okruženju sa puno vlage i prašine
4. Primenjiva u podrumima, podzemnim parkinzima, tunelima i drugim sličnim mestima...
5. Stepen zaštite IP 65

| Model | Dimenzije (LxWxH) mm | Prigušnice | Fluo cevi | Snaga (W) | Pakovanje (kom/kutija) |
|----------|----------------------|----------------------|-----------|-----------|------------------------|
| YZ-F 218 | 675 x 160 x 100 | Magnetne/elektronske | T8/18W | 2 x 18W | 6 |
| YZ-F 236 | 1280 x 160 x 100 | * | T8/36W | 2 x 36W | 6 |
| YZ-F 258 | 1580 x 160 x 100 | * | T8/58W | 2 x 58W | 6 |
| YZ-F 118 | 675 x 100 x 100 | * | T8/18W | 1 x 18W | 6 |
| YZ-F 136 | 1280 x 100 x 100 | * | T8/36W | 1 x 36W | 6 |
| YZ-F 158 | 1580 x 100 x 100 | * | T8/58W | 1 x 58W | 6 |




VODOOTPORNNA FLUO SVETILJKA SAMETALNIM KUCISTEM TIP: UN-NADO STEEL



1. Kuciste izradjeno od nerdjajuceg celika
2. Difuzor izradjen od providnog stakla
3. Reflektor: izradjen od celicnog lima prekriven belim polimerom
4. Otporna na vodu, prašinu ili koroziju, može se koristiti u okruženju sa puno vlage i prašine
5. Primenjiva u podrumima, podzemnim parkinzima, tunelima i drugim sličnim mestima...
6. Stepen zaštite IP 65
7. Dodatna oprema: Celicni nosaci za laku montazu

| Model | L | Dimenzije (LxWxH) mm | | | Y | Prigušnice | Fluo cevi | Snaga (W) | Pakovanje (kom/kutija) |
|-------------------|------|----------------------|----|----|------|------------|-----------|-----------|------------------------|
| UN-NADO STEEL 118 | 705 | 135 | 90 | 90 | 500 | MB/EB | T5 | 1X18W | 1 |
| UN-NADO STEEL 136 | 1305 | 135 | 90 | 90 | 1100 | MB/EB | T6 | 1X36W | 1 |
| UN-NADO STEEL 158 | 1605 | 135 | 90 | 90 | 1400 | MB/EB | T7 | 1X58W | 1 |
| UN-NADO STEEL 218 | 705 | 195 | 90 | 90 | 500 | MB/EB | T8 | 2X18W | 1 |
| UN-NADO STEEL 236 | 1305 | 195 | 90 | 90 | 1100 | MB/EB | T8 | 2X36W | 1 |
| UN-NADO STEEL 258 | 1605 | 195 | 90 | 90 | 1400 | MB/EB | T8 | 2X58W | 1 |

VODOOTPORNA FLUO SVETILJKA TIP: UX-NADO-T8





*INOX stainless clips on request

1. Voodootporna IP 65 svetiljka od UV polikarbonata
2. Kućište od sivog, brizganog polikarbonata
3. Poklopac od transparentnog polikarbonata
4. Predspojni uređaji: konvencionalna predspojna sprava, tridonic, ATCO, class EEI = B2
5. Elektronska predspojna sprava: helvar, EEI = A2
6. Grla: AAG ST UCCI
7. Stepen zaštite IP 65

| Model | Snaga (W) | Prigušnice | Dimenzije A x B x C |
|-----------------|-----------|------------|---------------------|
| UN-NADO PC.2 T8 | 1 x 36W | CCG B2 | 136 x 1270 x 101 |
| UN-NADO PC.2 T8 | 1 x 36W | ECG A2 | 136 x 1270 x 101 |
| UN-NADO PC.2 T8 | 1 x 58W | CCG B2 | 136 x 1570 x 101 |
| UN-NADO PC.2 T8 | 1 x 58W | ECG A2 | 136 x 1570 x 101 |
| UN-NADO PC.2 T8 | 2 x 36W | CCG B2 | 136 x 1270 x 101 |
| UN-NADO PC.2 T8 | 2 x 36W | ECG A2 | 136 x 1270 x 101 |
| UN-NADO PC.2 T8 | 2 x 58W | CCG B2 | 136 x 1570 x 101 |
| UN-NADO PC.2 T8 | 2 x 58W | ECG B2 | 136 x 1570 x 101 |

VODOOTPORNA FLUO SVETILJKA TIP: UX-NADO-T5

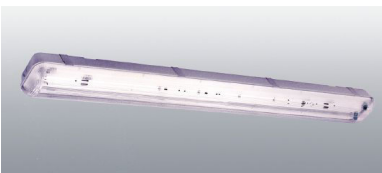

1. Voodootporna IP 65 svetiljka od UV polikarbonata
2. Kućište od sivog, brizganog polikarbonata
3. Poklopac od transparentnog polikarbonata
4. Predspojni uređaji: Elektronska predspojna sprava: helvar, class EEI = A2
5. Grla: AAG ST UCCI
6. Stepen zaštite IP 65

| Model | Snaga (W) | Prigušnice | Dimenzije A x B x C |
|-----------------|-----------|------------|---------------------|
| UN-NADO PC.2 T5 | 1 x 28W | ECG A2 | 136 x 1270 x 101 |
| UN-NADO PC.2 T5 | 1 x 35W | ECG A2 | 136 x 1570 x 101 |
| UN-NADO PC.2 T5 | 1 x 49W | ECG A2 | 136 x 1570 x 101 |
| UN-NADO PC.2 T5 | 1 x 54W | ECG A2 | 136 x 1270 x 101 |
| UN-NADO PC.2 T5 | 1 x 80W | ECG A2 | 136 x 1570 x 101 |
| UN-NADO PC.2 T5 | 2 x 28W | ECG A2 | 136 x 1270 x 101 |
| UN-NADO PC.2 T5 | 2 x 35W | ECG A2 | 136 x 1570 x 101 |
| UN-NADO PC.2 T5 | 2 x 49W | ECG A2 | 136 x 1570 x 101 |
| UN-NADO PC.2 T5 | 2 x 54W | ECG A2 | 136 x 1270 x 101 |
| UN-NADO PC.2 T5 | 2 x 80W | ECG A2 | 136 x 1570 x 101 |